



NWA5120 Series

802.11n/ac Unified Access Point

The Zyxel NWA5120 Series 802.11n/ac Unified Access Point is a highly future-proof WLAN solution perfect for growing business, hospitality and education environments. With a 2-in-1 standalone/managed AP design, users can initially use it as a standalone AP, and convert it to a controller-managed AP when WiFi demand grows. The Series is designed with industry-leading technology to provide trouble-free wireless quality to lower IT overhead. The embedded antennas and signal output are fine-tuned to provide easy RF planning and maximum signal coverage. It also supports such features as dynamic channel selection, load balancing and pre-authentication for superb WiFi experience.

Benefits

Ceiling-mount design blends into environments

Different from traditional business routers, low-profile ceiling-mount design of Zyxel NWA5120 Series provides better coverage and performance. The NWA5120 Series is a PoE AP with a multifunction design that solves all problems by offering internal as well as external antennas to enhance wireless performance and to eliminate coverage dead spots. Moreover, the signal outputs have been fine-tuned to provide easy RF planning and excellent signal coverage especially for hospitality and education environments.

The Zyxel NWA5120 Series is constructed from non-toxic casing materials, making it safe to install in plenum areas, as it won't release hazardous vapor emissions in the event of a fire. This is life-critical issue, particularly when deploying in public venues such as offices, hotels, and schools.



Optimized RF performance for ceiling mounting deployment



2-in-1 standalone/managed AP design



CAPWAP management supported



Enterprise class 2x2 802.11ac AP supports combined data rates of up to 1200 Mbps (NWA5123-AC)



APFlex™ and Zyxel One Network utilities make deployment simple and fast

Zyxel one network experience

Aiming for relieving our customers from repetitive operations of deploying and managing a network, Zyxel one network is designed to simplify the configuration, management, and troubleshooting, allowing our customers to focus on the business priorities. Zyxel one network presents an easy-to-use tool, Zyxel one network utility (ZON utility), to realize speed network setup. Zyxel Smart Connect allows Zyxel networking equipment to be aware and recognize each other and further facilitating the network maintenance via one-click remote functions such as factory reset or power cycling. Zyxel one network redefines the network integration across multiple networking products from switch to WiFi AP and to Gateway.

Effortless conversion from standalone to centrally-managed

The Zyxel NWA5120 Series Unified APs can be configured as a fully functional standalone AP and also capable to work with Wireless LAN Controller to form a robust controller-based WLAN solution with centralized management when WiFi demand grows, as well as auto AP provisioning over both LAN and WAN connections. After being installed and powered on, the APs automatically look for the Wireless LAN Controller and establish connections. Utilizing the CAPWAP protocol, connections can be established between the controller and APs without needing to change the existing LAN infrastructure.


Ultra-fast Gigabit WiFi experience

Featuring the latest 802.11ac standard, the NWA5123-AC not only provides data rates of up to 1200 Mbps, but also optimizes signal with its advanced antenna design to bring the best user experience through a higher number of parallel video data streams for minimized latency on the network. Additionally, the concurrent dual-band support enables NWA5123-AC to satisfy clients using both 2.4 GHz and 5 GHz at the same time and is perfect for high-density applications such as hospitality, education and business.

Streamlined deployments for optimized WLAN experience

The NWA5120 Series features APFlex™ to simplify managed/standalone AP mode configuration to integrate with network environments automatically and to eliminate the need for pre-install preparations. To deliver optimized wireless experience for users, the NWA5120 Series features Dynamic Channel Selection (DCS), Load Balancing and Smart Client Steering, etc. Dynamic Channel Selection (DCS) avoids interference from co-channel and channel overlapping at initialization, while Load Balancing enables administrators to set limits on the number of clients associated with each AP. Furthermore, Smart Client steering features Band Select, Signal Threshold and Band Balancing for stable, reliable wireless connections. Band Select and Signal Threshold monitor the capabilities of each wireless client and steer them to the less-congested band and the AP with better signal. Band Balancing detects dual-radio clients and distributes clients across 2.4 GHz and 5 GHz bands on AP. These advanced functions ensure the NWA5120 Series to provide a smooth, consistent and uninterrupted wireless access experience.

Applications Diagram

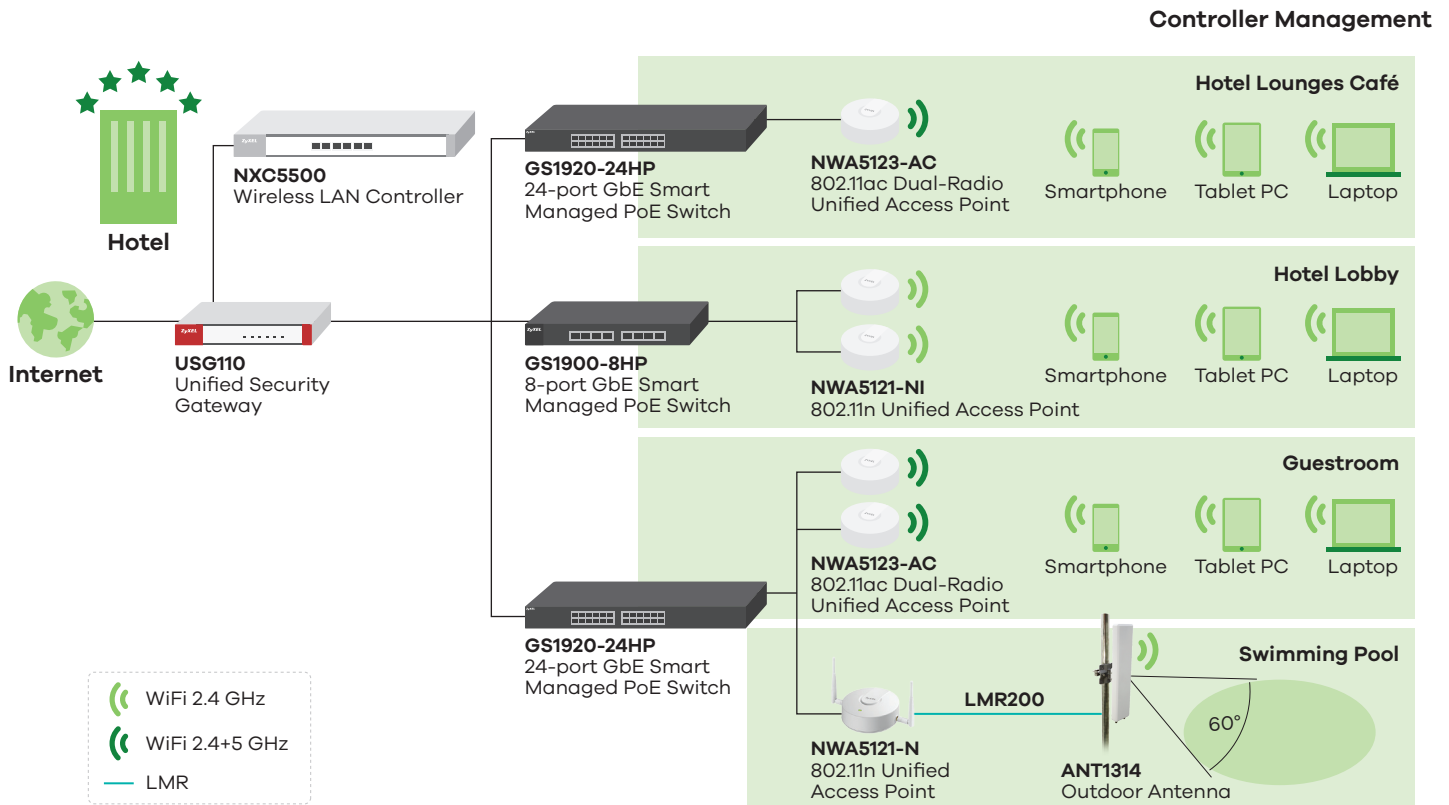

Feature Highlights



Ultra-fast Speed

NWA5123-AC is the 2x2 802.11ac AP which provides Gigabit WiFi experience. The concurrent dual-band support meets the incremental BYOD demands to support more clients with equal signal coverage in both 2.4 GHz and 5 GHz bands. There's no latency to transmit high bandwidth data such as video and voice streaming.



ZyMesh

Wireless Mesh is an array of access points automatically forming dynamic wireless links. Built on this foundation of mesh networking, ZyMesh is Zyxel's proprietary protocol for creating wireless mesh links for easy configuration, optimized management and enhanced reliability.



Zyxel AP Configurator

While deploying a number of APs, repetitive configuration of each unit takes time and effort. Zyxel AP Configurator (ZAC) builds templates that allow users to copy one profile to several APs, allowing batch firmware upgrades and profile backups in three easy steps to significantly reduce configuration time and effort.



Zyxel APFlex™

Zyxel APFlex™ includes Zero-touch AP mode changing and Automatic IP configuration functions. The Zero-touch AP mode setting detects if there is an existing Zyxel controller and to choose stand-alone or managed mode accordingly.

The Automatic IP configuration removes manual configuration and allows the AP to set itself to fixed or dynamic IP address automatically. With these two intelligent features, IT administrators can skip the two critical settings that had to be handled manually on legacy products and focus to more critical configuration tasks instead.



WPA2 Enterprise

NWA5120 series features with industrial strength WPA2 enterprise protection and supports a wide range of Extensible Authentication Protocol (EAP) types. It can be seamlessly integrated with deployed corporate RADIUS servers.



Wireless Layer-2 Isolation

The Layer-2 isolation protects private networks among client users, allowing users to access their shared devices without entering the rest of a private network for enhanced security. In addition, the intra-BSS blocking prevents different WiFi clients associated with the same AP from seeing each other and each other's data.



Zyxel One Network Utility

To streamline the management process, the NWA5120 series comes with the Zyxel one network (ZON) utility, allowing administrators to assign IP addresses to multiple APs through just one platform.




Administrators can avoid the hassle logging into each AP to change the default IP addresses before physical installation.



Zyxel Wireless Optimizer

Zyxel Wireless Optimizer (ZWO) provides a powerful tool for centralized management covering initial planning, adjustment during deployment and after-sale maintenance of an AP network. Architects can simulate AP deployment on a map displaying the number of APs needed. During deployment, ZWO will also map actual signal coverage for architects to adjust their AP locations or configurations. After-sale, network administrators can access key performance details from ZWO, including channel in use, transmit retry rate and frame error rate, as well as the devices on the environment map. ZWO's user-friendly presentation saves time and facilitates quick response to the network problems.

Specifications

Model	NWA5121-NI	NWA5121-N	NWA5123-AC
Product name	802.11n Unified Access Point	802.11n Unified Access Point	802.11ac Dual-Radio Unified Access Point
			
Wireless			
Standard	IEEE 802.11 n/g/b/a	IEEE 802.11 n/g/b/a	IEEE 802.11 ac/n/g/b/a
MIMO	SU-MIMO	SU-MIMO	SU-MIMO
Wireless speed	300 Mbps	300 Mbps	2.4 GHz 300 Mbps 5 GHz 866 Mbps
Frequency band	2.4 GHz (IEEE 802.11 b/g/n) <ul style="list-style-type: none"> • USA (FCC): 2.412 to 2.462 GHz • Europe (ETSI): 2.412 to 2.472 GHz 	<ul style="list-style-type: none"> • USA (FCC): 2.412 to 2.462 GHz • Europe (ETSI): 2.412 to 2.472 GHz 	<ul style="list-style-type: none"> • USA (FCC): 2.412 to 2.462 GHz • Europe (ETSI): 2.412 to 2.472 GHz
	5 GHz (IEEE 802.11 a/n/ac) <ul style="list-style-type: none"> - 	<ul style="list-style-type: none"> - 	<ul style="list-style-type: none"> • USA (FCC): 5.15 to 5.35 GHz; 5.725 to 5.850 GHz • Europe (ETSI): 5.15 to 5.35 GHz; 5.470 to 5.725 GHz
Bandwidth	20- and 40-MHz	20- and 40-MHz	20-, 40- and 80-MHz
Transmission power¹			
	US	20 dBm	20 dBm
	EU	17 dBm	18 dBm
			<ul style="list-style-type: none"> • 2.4 GHz: 23 dBm • 5 GHz: 26 dBm
			<ul style="list-style-type: none"> • 2.4 GHz: 23 dBm • 5 GHz: 26 dBm
RF Design			
Antenna type	2x2 MIMO	2x2 MIMO	2x2 MIMO
Antenna gain			
	2.4 GHz	7 dBi	3 dBi
	5 GHz	-	4 dBi
Minimum Receive sensitivity²	Min. Rx sensitivity up to -95 dBm	Min. Rx sensitivity up to -95 dBm	Min. Rx sensitivity up to -99 dBm
WLAN Features			
Band Steering	Yes	Yes	Yes
WDS	Yes	Yes	Yes
Mesh AP (By license)³	Yes	Yes	Yes
Mesh AP for multiple SSID with VLAN ³	Yes	Yes	Yes
Fast roaming³	Pre-authentication, PMK caching and 802.11r	Pre-authentication, PMK caching and 802.11r	Pre-authentication, PMK caching and 802.11r/k/v ⁴

Model	NWA5121-NI	NWA5121-N	NWA5123-AC
Security			
Encryption	WEP/WPA/WPA2-PSK	WEP/WPA/WPA2-PSK	WEP/WPA/WPA2-PSK
Authentication	WPA/WPA2-Enterprise/ EAP (-TLS, -TTLS, -PEAP, -FAST, -AKA and -SIM)/ IEEE 802.1X/RADIUS authentication	WPA/WPA2-Enterprise/ EAP (-TLS, -TTLS, -PEAP, -FAST, -AKA and -SIM)/ IEEE 802.1X/RADIUS authentication	WPA/WPA2-Enterprise/ EAP (-TLS, -TTLS, -PEAP, -FAST, -AKA and -SIM)/ IEEE 802.1X/RADIUS authentication
Access management	L2-isolation/MAC filtering/ Rogue AP detection	L2-isolation/MAC filtering/ Rogue AP detection	L2-isolation/MAC filtering/ Rogue AP detection
Network			
VLANs	Yes	Yes	Yes
WMM	Yes	Yes	Yes
U-APSD	Yes	Yes	Yes
DiffServ marking	Yes	Yes	Yes
Management			
Operating mode	Controller-managed/ Standalone	Controller-managed/ Standalone	Controller-managed/ Standalone
ZON Utility	<ul style="list-style-type: none"> Discovery of Zyxel switches, APs and gateways Centralized and batch configurations <ul style="list-style-type: none"> IP configuration IP renew Device reboot Device locating Web GUI access Firmware upgrade Password configuration One-click quick association with Zyxel AP Configurator (ZAC) 	<ul style="list-style-type: none"> Discovery of Zyxel switches, APs and gateways Centralized and batch configurations <ul style="list-style-type: none"> IP configuration IP renew Device reboot Device locating Web GUI access Firmware upgrade Password configuration One-click quick association with Zyxel AP Configurator (ZAC) 	<ul style="list-style-type: none"> Discovery of Zyxel switches, APs and gateways Centralized and batch configurations <ul style="list-style-type: none"> IP configuration IP renew Device reboot Device locating Web GUI access Firmware upgrade Password configuration One-click quick association with Zyxel AP Configurator (ZAC)
Smart Connect	<ul style="list-style-type: none"> Neighbor device discovery One-click remote management access to the neighboring Zyxel devices 	<ul style="list-style-type: none"> Neighbor device discovery One-click remote management access to the neighboring Zyxel devices 	<ul style="list-style-type: none"> Neighbor device discovery One-click remote management access to the neighboring Zyxel devices
ZAC	<ul style="list-style-type: none"> Batch AP configuration Batch AP firmware upgrade Batch AP profile backup 	<ul style="list-style-type: none"> Batch AP configuration Batch AP firmware upgrade Batch AP profile backup 	<ul style="list-style-type: none"> Batch AP configuration Batch AP firmware upgrade Batch AP profile backup
Zyxel Wireless Optimizer	<ul style="list-style-type: none"> WiFi AP planning WiFi coverage detection^{*3} Wireless health management 	<ul style="list-style-type: none"> WiFi AP planning WiFi coverage detection^{*3} Wireless health management 	<ul style="list-style-type: none"> WiFi AP planning WiFi coverage detection^{*3} Wireless health management
Web UI/CLI	Yes	Yes	Yes
SNMP	Yes	Yes	Yes

Model		NWA5121-NI	NWA5121-N	NWA5123-AC
Physical Specifications				
Ethernet port		1x 10/100/1000M LAN	1x 10/100/1000M LAN	1x 10/100/1000M LAN
Console port		-	-	4 pin
Power		<ul style="list-style-type: none"> • Input: AC 100 - 240 V - 50/60 Hz 0.3 A; Output: DC +12 V 1 A • PoE (802.3af): power draw 4 W 	<ul style="list-style-type: none"> • Input: AC 100 - 240 V - 50/60 Hz 0.3 A; Output: DC +12 V 1 A • PoE (802.3af): power draw 4 W 	<ul style="list-style-type: none"> • Input: AC 100 - 240 V - 50/60 Hz 0.3 A; Output: DC +12 V 1 A • PoE (802.3af): power draw 9 W
Plenum rating		Yes	Yes	Yes
Item	Dimensions (WxDxH)(mm/in.)	130 x 130 x 54.5/ 5.12 x 5.12 x 2.17	130 x 130 x 54.5/ 5.12 x 5.12 x 2.17	130 x 130 x 54.7/ 5.12 x 5.12 x 2.17
	Weight (kg/lb.)	0.23/0.51	0.23/0.51	0.30/0.67
Packing	Dimensions (WxDxH)(mm/in.)	282 x 207 x 71/ 11.10 x 8.15 x 2.80	282 x 207 x 71/ 11.10 x 8.15 x 2.80	278 x 209 x 72/ 10.94 x 8.23 x 2.83
	Weight (kg/lb.)	0.61/1.34	0.61/1.34	0.70/1.54
Included accessories		<ul style="list-style-type: none"> • Power adapter • Mounting bracket 	<ul style="list-style-type: none"> • Power adapter • Mounting bracket 	<ul style="list-style-type: none"> • Power adapter • Mounting bracket
MTBF (hr)		627152	627152	1241824
Environmental Specifications				
Operating	Temperature	0°C to 50°C/32°F to 122°F	0°C to 50°C/32°F to 122°F	0°C to 50°C/32°F to 122°F
	Humidity	10% to 90% (non-condensing)	10% to 90% (non-condensing)	10% to 90% (non-condensing)
Storage	Temperature	-30°C to 70°C/ -22°F to 158°F	-30°C to 70°C/ -22°F to 158°F	-30°C to 70°C/ -22°F to 158°F
	Humidity	10% to 90% (non-condensing)	10% to 90% (non-condensing)	10% to 90% (non-condensing)
Certifications				
Radio		ETSI EN 300 328 V1.7.1: 11-2006 FCC Part 15.247 LP0002; EN 60601-1-2: 2007	ETSI EN 300 328 V1.7.1: 11-2006 FCC Part 15.247 LP0002; EN 60601-1-2: 2007	ETSI EN 300 328 V1.7.1: 11-2006 EN 301 893 V1.5.1 FCC Part 15.247, FCC Part 15E LP0002; EN 60601-1-2: 2007
EMC		EN 301 489-1 V1.8.1: 04-2008 EN 301 489-17 V2.1.1: 05-2009 EN55022: 2010; EN55024: 2010; EN61000-3-2/-3 FCC Part 15.107; BSMI CNS13438.99; CNS14336: 99	EN 301 489-1 V1.8.1: 04-2008 EN 301 489-17 V2.1.1: 05-2009 EN55022: 2010; EN55024: 2010; EN61000-3-2/-3 FCC Part 15.107; BSMI CNS13438.99; CNS14336: 99	EN 301 489-1 V1.8.1: 11-2008 EN 301 489-17 V2.1.1: 05-2009 EN55022: 2010, EN55024: 2010 EN61000-3-2/-3, FCC Part 15.107 BSMI CNS13438.99; CNS14336: 99
Safety		EN 60950-1: 2006 + A11: 2009 + A1: 2010 + A12: 2011; IEC 60950-1: 2005; BSMI	EN 60950-1: 2006 + A11: 2009 + A1: 2010 + A12: 2011; IEC 60950-1: 2005; BSMI	EN 60950-1: 2006 + A11: 2009 + A1: 2010 + A12: 2011; IEC 60950-1: 2005; BSMI

*1: Max power varies by country setting, band, and MCS rate

*2: Rx sensitivity varies by band, channel width, and MCS rate

*3: Supports when working with Zyxel NXC controller

*4: 802.11k/v are supported on NWA5123-AC from v5.30

Weather-Proof Mounting Option

Outdoor Enclosure

People like to enjoy the combination of great view, fresh air and WiFi service when they're outdoors. This weather-resistant enclosure brings the Zyxel indoor AP outdoors to make deployments in places such as parks, campus, poolside or camping yard convenient and affordable. This enclosure allows the AP to be easily mounted on any wall or pole. The durable enclosure is designed to withstand a wide range of temperature from 50°C to -20°C, waterproof the APs with IPX5 rating certified and extend lifespan with the UV stabilized plastic, which makes it the most reliable weatherproof enclosure.



Features

- **Compatible with various APs** including unified, cloud-managed and standalone units
- **Wide operating temperature** range from 50°C to -20°C
- **Compact size** easily blends into any environment seamlessly
- **UV stabilized plastic** extends enclosure lifetime
- **Flexible mount design** for wall mount, or pole mount installation with pole mount kit (sold separately)
- **IPX5 rating** makes Zyxel indoor AP weatherproof



Wall mount installation





Pole mount installation

Specifications

Model	Enclosure
Dimensions (WxDxH)(mm/in.)	238.54 x 249.72 x 86.97/9.39 x 9.83 x 3.42
Weight (kg/lb.)	0.64/1.4
Mounting options	Wall, Pole (pole mount kit is sold separately)
Certified	IPX5
Adjustability	Swivel +/-40° Tilt +/-15°

Compatibility List



Model	Compatible AP Models
	<ul style="list-style-type: none"> • NWA1123-ACv2 • NWA5121-NI • NWA5123-AC • NAP102
	<ul style="list-style-type: none"> • NWA1123-AC PRO • WAC6103D-I • NAP203

Optional Accessory

Part Number	Description
ACCESSORY-ZZ0105F	Accessory, T-bar ceiling clips for ceiling mount AP to WAC6303D-S, 5 sets, ROHS

ZYXEL

Your Networking Ally

For more product information, visit us on the web at www.zyxel.com

Copyright © 2019 Zyxel Communications Corp. All rights reserved. Zyxel, Zyxel logo are registered trademarks of Zyxel Communications Corp. All other brands, product names, or trademarks mentioned are the property of their respective owners. All specifications are subject to change without notice.

Datasheet [NWA5120 Series](#)



5-100-00719011 02/19